



FEATURES

- ◆ Wide 2:1 Input Range
- ◆ Full SMD-Design
- ◆ High Efficiency up to 86%
- ◆ Extended Operating Temperature
- ◆ Range -40°C to 85°C
- ◆ I/O-isolation 1500 VDC
- ◆ Indefinite Short-Circuit Protection
- ◆ RoHS Compliance
- ◆ 24-pin DIP with Industry Standard Pinout
- ◆ High Reliability, MTBF >1 Mio. H
- ◆ 3 Year Product Warranty

MODEL SELECTION

WRB^①24^②05^③Y^④D^⑤-5W(1000)^⑥

- ① Product Series
- ② Input Voltage
- ③ Output Voltage
- ④ Wide (2:1) Input Range
- ⑤ DIP24 Package Style
- ⑥ Rated Power(Output current)

APPLICATIONS

The WRA-YD-5W&WRB-YD-5W of 2:1.State of the art SMD-technology guarantees a product with very high reliability and good cost or performance ratio. High efficiency allows an operating temperature range of -40°C to +85°C without derating. I/O-isolation of 1500 VDC together with conducted noise compliance to EN 55022-A and FCC, level A makes these converters ideal for a wide range of applications in communications, mobile battery powered equipments and industrial systems.



CE REACH
MICRODC RESERVES THE COPYRIGHT

SELECTION GUIDE

Order code	Input Voltage (VDC)	Output		Efficiency (%.Typ.)
		Voltage (VDC)	Current Max.	
WRB0503YD-1200	4.5 - 7	3.3	1200	75%
WRB0505YD-5W	4.5 - 7	5	1000	79%
WRA0505YD-5W	4.5 - 7	±5	±500	82%
WRB1203YD-1200	9 - 18	3.3	1200	77%
WRB1205YD-5W	9 - 18	5	1000	81%
WRA1205YD-5W	9 - 18	±5	±500	81%
WRA1212YD-5W	9 - 18	±12	±208	83%
WRB2403YD-1200	18 - 36	3.3	1200	79%
WRB2405YD-5W	18 - 36	5	1000	83%
WRA2405YD-5W	18 - 36	±5	±500	83%
WRB4803YD-1200	36 - 75	3.3	1200	79%
WRB4805YD-5W	36 - 75	5	1000	83%
WRA4805YD-5W	36 - 75	±5	±500	83%

Input Specifications

Input current no load /full load	5 Vin models	50mA / 1460mA typ.
	12 Vin models	20mA / 590mA typ.
load	24 Vin models	5mA / 290mA typ.
	48 Vin models	3mA / 145mA typ.
Start-up voltage / under voltage shut down	5 Vin models	4.4 VDC / 4.0 VDC
	12 Vin models	8.0 VDC / 8.0 VDC
	24 Vin models	16.0 VDC / 16.0 VDC
	48 Vin models	32.0 VDC / 32.0 VDC
	5 Vin models	10 V max.
	12 Vin models	25 V max.
Surge voltage (1 sec. max.)	24 Vin models	50 V max.
	48 Vin models	100 V max.
Reverse voltage protection		1.0 A max.
Conducted noise (input)		EN 55022 level A, FCC part 15, level A

Output Specifications

Voltage set accuracy		1 %
Regulation	- Input variation Vin min. to Vin max.	0.3 % max.
	- Load variation 10 - 100 %	
	- single output models	1 % max.
	- dual output models balanced load	1 % max.
	- dual output models unbalanced	3 % max.
Ripple and noise (20 MHz Bandwidth)		50 mVpk-pk max.
Temperature coefficient		± 0.02 % /K
Output current limitation		>120 % of Iout max., constant
Short-circuit protection		indefinite (automatic recovery)
Capacitive load	- single output models	6800 µF max.
	- dual output models	1000 µF max. (each output)

General Specifications


Temperature ranges	- Operating	-40 °C ... +85 °C
	- Case temperature	+100 °C max.
	- Storage	-55 °C ... +125 °C
Derating		3.5% /K above 70 °C
Humidity(non condensing)		95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217 E)		>1 Mio. h @ +25 °C
Isolation voltage	Input/Output	1500 VDC
Isolation capacity	Input/Output	380 pF typ.
Isolation resistance	Input/Output (500 VDC)	> 1000 M Ohm
Switching frequency		300 kHz typ. (Pulse frequency modulation PFM)
Safety standards	UL 60950, IEC 60950, EN 60950 Compliance up to 60 VDC input voltage(SELV limit)	
	Safety approval UL /cUL File E188913 (5Vin models pending)	

Physical Specifications

Case material	steel, Nickel plated
Baseplate material	non conductive FR4
Potting material	epoxy (UL 94V-0 rated)
Weight	14 g (0.55 oz)
Soldering temperature	max. 265 °C / 10 sec.


TYPICAL CHARACTERISTICS

Temperature Derating Graph

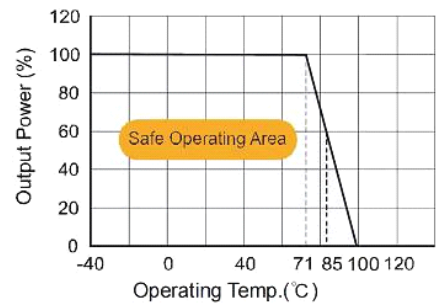


RECOMMENDED CIRCUIT

Output Graph

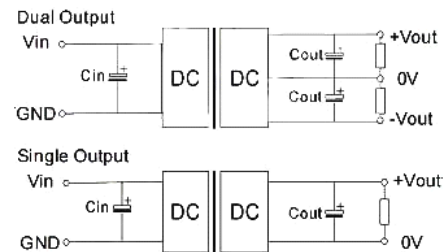

(Figure 1)

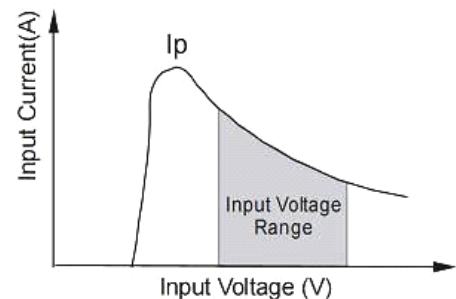

(Figure 2)

APPLICATION NOTE

Requirement on output load

In order to ensure the product operate efficiently and reliably, in addition to a max load (namely full load), a minimum load is specified for this kind of DC/DC converter. Make sure the specified range of input voltage is not exceeded, the minimum output load **no less than 10% load**. If the actual load is less than the specified minimum load, the output ripple may increase sharply while its efficiency and reliability will reduce greatly. If the actual output power is very small, please add an appropriate resistor as extra loading, or contact our company for other lower output power products.

Recommended Circuit

All the WRA_YD-5W & WRB_YD-5W Series have been tested according to the following recommended testing circuit before leaving factory. This series should be tested under load (See figure 1).

If you want to further decrease the input/output ripple, you can increase capacitance properly or choose capacitors with low ESR. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

General: Cin: 5V & 12V 100μF
 24V & 48V 100μF-47μF
 Cout: 10μF/100mA

Input current


While using unstable power source, please ensure the output voltage and ripple voltage do not exceed indexes of the converter. Input current of power supply should afford the startup current of this kind of DC/DC module (See figure 2).

General: $I_p \leq 1.4 \cdot I_{in-max}$

No parallel connection or plug and play


OUTLINE DIMENSIONS & FOOTPRINT DETAILS

MECHANICAL DIMENSIONS

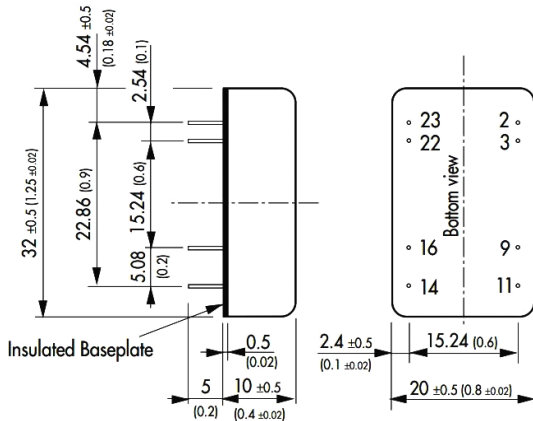

Note:
 Pin diameter $\varnothing 0.5 \pm 0.05$ (0.02 \pm 0.002)
 Tolerances ± 0.5 (0.02)

RECOMMENDED FOOTPRINT

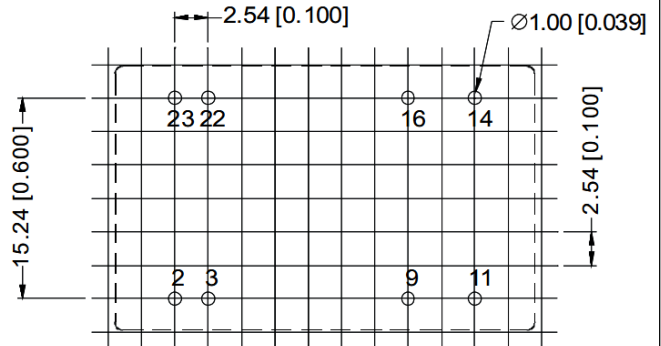

RECOMMENDED FOOTPRINT
 Top view grid: 2.54mm(0.1inch)
 diameter: 1.00mm(0.039inch)

FOOTPRINT DETAILS

Pin	Single	Dual
2、3	-Vin (GND)	-Vin (GND)
9	No pin	Common
11	No con.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22、23	+Vin (Vcc)	+Vin (Vcc)


NC: No connection

When the environment temperature is higher than 71°C, the product output power should be less than 60% of the rated power.

No parallel connection or plug and play.

Use dual output simultaneously, forbid pening output pin (0V) to use as single output.

TUBE OUTLINE DIMENSIONS

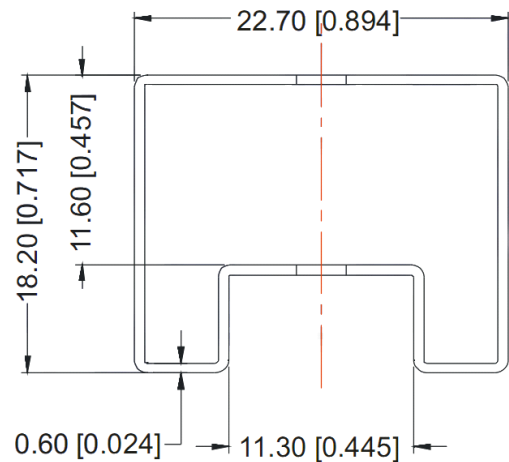

Note:
 Unit :mm[inch]
 General tolerances: ± 0.50 mm[± 0.020 inch]
 L=530mm[20.866inch] Tube Quantity: 15pcs
 L=220mm[8.661inch] Tube Quantity: 6pcs

RoHS COMPLIANT INFORMATION

This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems.

REACH COMPLIANT INFORMATION

This series has proven that this product does not contain harmful chemicals, it also has harmful chemical substances through the registration, inspection and approval.